


DOCTOR BLADE OSCILLATORS

COMPACT PNEUMATIC DOCTOR BLADE OSCILLATOR FOR DRY AND WET END APPLICATIONS

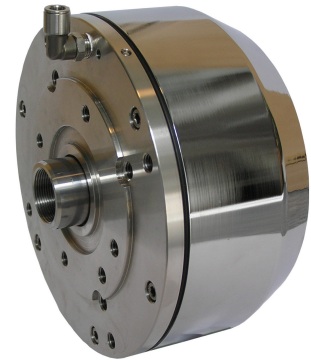

Benefits

- Same product for both dry and wet end applications
- Maintenance free life-time expectancy over 5 years
- External parts in contact with ambient made of AISI316
- Effective air cushioning system eliminates vibration and dwell of the doctor blade
- Compact size and light weight
- No lubrication needed
- Adjustable speed and stroke length
- Flexible mounting options

[Compact Pneumatic Doctor Blade Oscillator brochure](#)
[Download](#)

TECHNICAL DETAILS

| | |
|---------------------------|---|
| Thrust force | 11 kN & 22 kN versions at 6 bar |
| Pressure range | 2,5-10,0 bar |
| Ambient temperature range | -5...+150°C |
| Speed range | recommended number of back-and forth strokes 3...5 strokes/min |
| Stroke length | Factory set 16 mm, adjustable range 10-16 mm in steps of 2 mm |