


# PUSH-IN FITTING AISI316L

MX series

## Features:

- Application fields: Pneumatics, Food Industry, Chemical, Medical and Pharmaceutical Industry
- Maximum pressure 18 bar
- Suitable for vacuum up to 750 mmHg
- Recommended tubing: PVDF, PTFE and Stainless steel tube

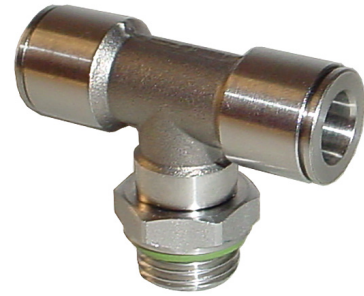

[MX series brochure pdf eng](#) [Download here](#)

## TECHNICAL DETAILS

|                   |  |
|-------------------|--|
| Tube size         | O.D. 4 ... 12 mm depending on the type<br>Toleranssi<br>+/- 0,07 mm diameters 4 ... 10 mm<br>+/- 0,1 mm diameter 12 mm |
| Thread size       | M5 ... G1/2 depending on the type  |
| Temperature range | -20 ... +150 °C  |
| Materials         | Body and release ring: AISI316L<br>Gripping collet: AISI301<br>Seals: Viton  |