


# ISO 15552 CYLINDERS - P2720

## P2720-SERIES

### Technical characteristics

Double acting cylinder, with magnetic piston as standard feature

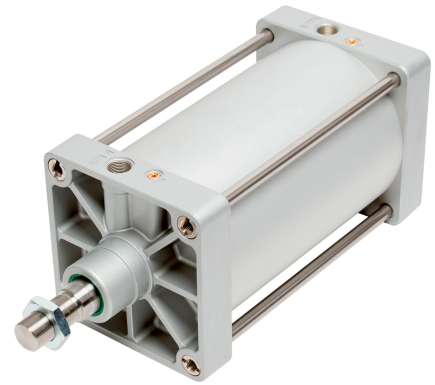

- ISO 15552 construction
- Diecast aluminum covers
- Hard anodized round tube with tie rod construction
- Chromed piston rod
- Pressure range: 0...10bar
- Temperature range: -35...+80°C with standard seals (PU)
- Media: Pressurized air ( filtered 40µm) or inert gas. Lubricated or dry
- Diameter 32...320mm
- Standard strokes: 25...1000mm
- Viton seals as an option (max temperature +150°C)
- Other special seals available upon request

### Constructions

- P2720 Double acting cylinder
- P2721 Cylinder with double rod
- P2722 Double cylinder (tandem)
- P2723 Rear opposed tandem
- P2724 Single acting front spring
- P2725 Single acting rear spring
- P2728 Multi-position tandem
- P2729 Double acting cylinder with internal anti-rotation

[P2720 cylinders brochure pdf](#) **Download here**

## TECHNICAL DETAILS

Cylinder diameters	32...320 mm
Pressure range	0...10 bar
Media	Pressurized air (filtered 40µm) or inert gas. Lubricated or dry
Temperature range	-30...+80°C with standard seals (PU)



www.pimatic.fi

Saved  
2.04.2025

